




A technical shielding gas with a reducing gas to increase efficiency and weld speeds.

Application

TIG & PLASMA welding of austenitic stainless steels. TIG brazing of galvanised steels. TIG orbital welding of austenitic steels.

Safety Information

UN Number : 1956
Hazchem : 2TE
 2 = Fine Water Spray
 T = PPE; BA and Full Fire kit
 Appropriate measures : dilute
 E = Public Hazard Safety

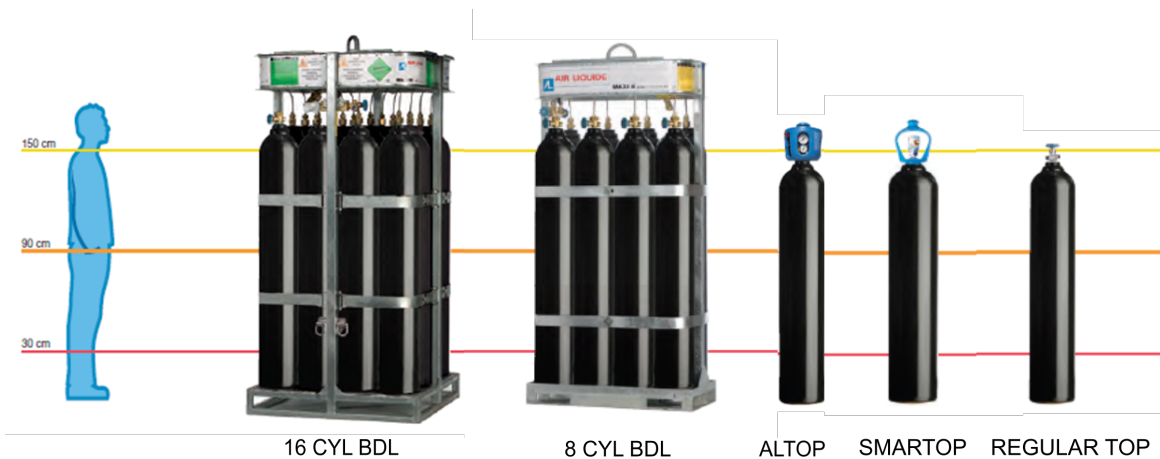

Product Code	200284
Packaging	CYL TOP
Volume (m3)	
Max Weight -kgs (Full)	73
Water Capacity (Liters)	50
Purity	H2 +0%; -1%
Impurities	
Valve Specification	RPV G 3/4-14, LH Internal

Material Safety Datasheet

Product Complies to :

Air Liquide India Holding Pvt. Limited
 A-24/10, Mohan Cooperative Industrial Estate,
 Mathura Road, New Delhi - 110044
 Tel: +91 11 6129 2200, +91 99106 53688
 email : sales.india@airliquide.com

www.airliquide.com