



Solution for Laser welding applications to boost performance.

Application

High performance Laser welding shielding gas with improved efficiency.

Safety Information

UN Number : 1956


Hazchem : 2TE

2 = Fine Water Spray

T = PPE; BA and Full Fire kit

Appropriate measures : dilute

E = Public Hazard Safety

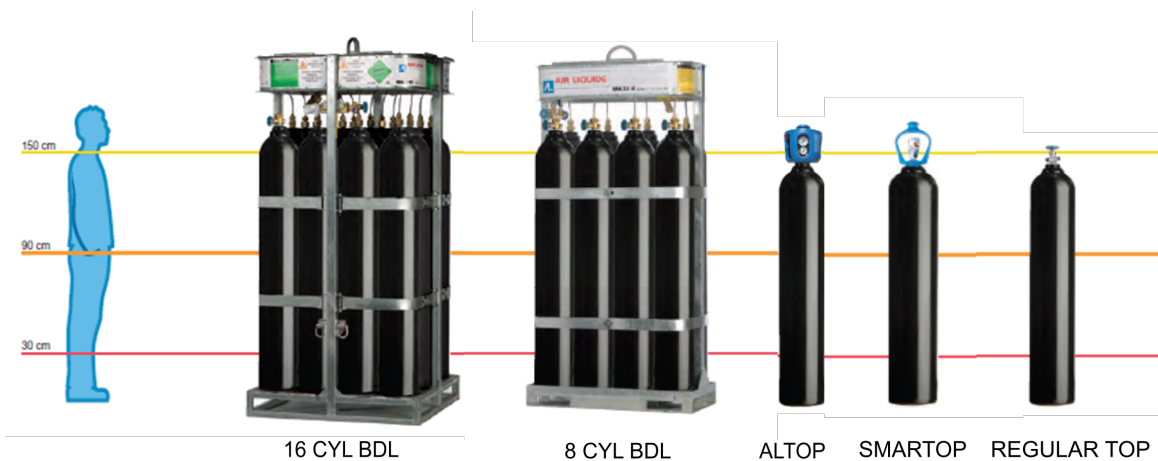

Product Code	220596
Packaging	CYL TOP
Volume (m3)	
Max Weight -kgs (Full)	73
Water Capacity (Liters)	50
Purity	He ± 3 %
Impurities	
Valve Specification	RPV G 3/4-14, RH External with Dip Tube

Material Safety Datasheet

Product Complies to :

EN ISO 14175-I3-ArHe-30, ANSI / AWS A5 32, A5 32M-97

Air Liquide India Holding Pvt. Limited
 A-24/10, Mohan Cooperative Industrial Estate,
 Mathura Road, New Delhi - 110044
 Tel: +91 11 6129 2200, +91 99106 53688
 email : sales.india@airliquide.com

www.airliquide.com