



The simple solution to enhance your analytical performance.

## Application

Flame Gas (AAS, FID, CLD, THC). Instrumentation Gas (LCMS, NMR, TGA, TOC). Purge (UV, FTIR). Zero Gas (GC-FID, FTIR).

## Safety Information

**UN Number :** 1002


**Hazchem :** 2T

2 = Fine Water Spray

T = PPE; BA and Full Fire kit

Appropriate measures : dilute

E = Public Hazard Safety

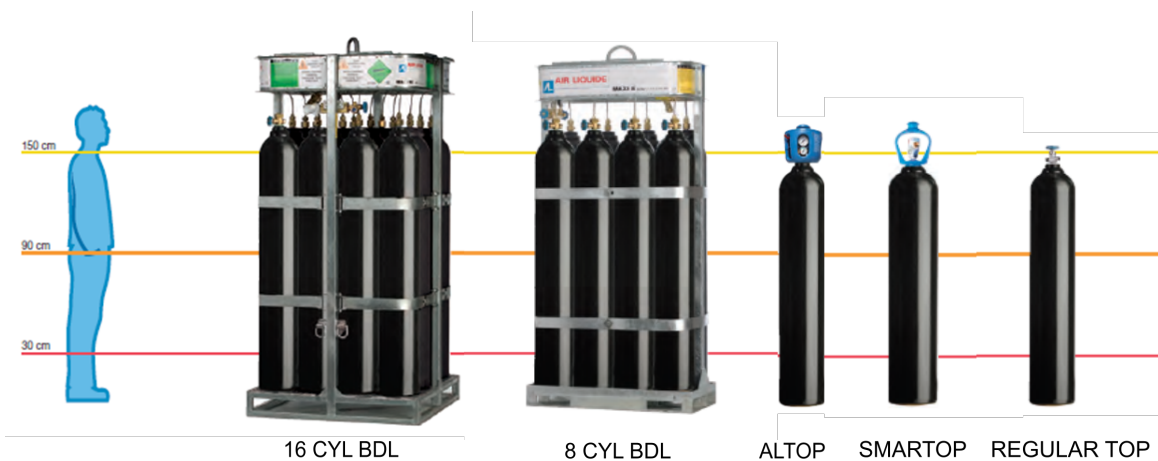

Product Code	230212	230219
Packaging	CYL TOP	BDL 16X
Volume (m3)		
Max Weight -kgs (Full)	73	1680
Water Capacity (Liters)	50	800
Purity	O2 ± 1%; N2 + O2 > 99.999%	
Impurities		
Valve Specification	RPV G 3/4-14, RH External with Dip tube	

## Material Safety Datasheet

## Product Complies to :

Air Liquide India Holding Pvt. Limited  
 A-24/10, Mohan Cooperative Industrial Estate,  
 Mathura Road, New Delhi - 110044  
 Tel: +91 11 6129 2200, +91 99106 53688  
 email : sales.india@airliquide.com

[www.airliquide.com](http://www.airliquide.com)