



The all rounded shielding gas for arc welding

Application

All purpose MAG welding of carbon steels. MAG welding of solid & FLUX cored wires.

Safety Information

UN Number : 1956


Hazchem : 2TE

2 = Fine Water Spray

T = PPE; BA and Full Fire kit

Appropriate measures : dilute

E = Public Hazard Safety

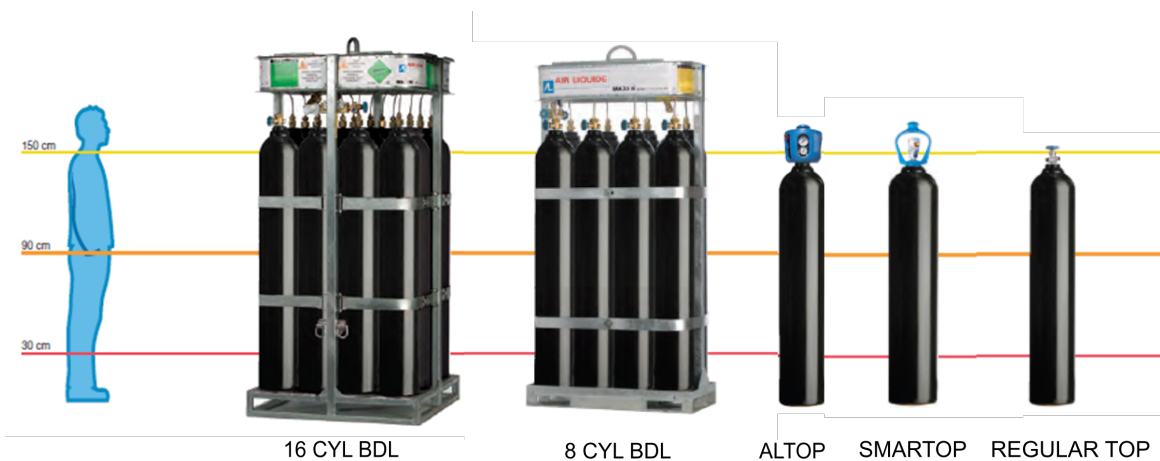

Product Code	200520
Packaging	BDL 16X
Volume (m3)	
Max Weight -kgs (Full)	1680
Water Capacity (Liters)	800
Purity	CO ₂ ± 1.8%
Impurities	
Valve Specification	RPV G3/4-14, RH-External with Dip Tube

Material Safety Datasheet

Product Complies to :

EN ISO 14175-M21-ArC-18, ANSI / AWS A5 32, A5 32M-97

Air Liquide India Holding Pvt. Limited
 A-24/10, Mohan Cooperative Industrial Estate,
 Mathura Road, New Delhi - 110044
 Tel: +91 11 6129 2200, +91 99106 53688
 email : sales.india@airliquide.com

www.airliquide.com