




A technical shielding gas with a reducing gas to increase efficiency and weld speeds.

Application

TIG & PLASMA welding of austenitic stainless steels. TIG brazing of galvanised steels. TIG orbital welding of austenitic steels.

Safety Information

UN Number : 1956
Hazchem : 2TE
 2 = Fine Water Spray
 T = PPE; BA and Full Fire kit
 Appropriate measures : dilute
 E = Public Hazard Safety

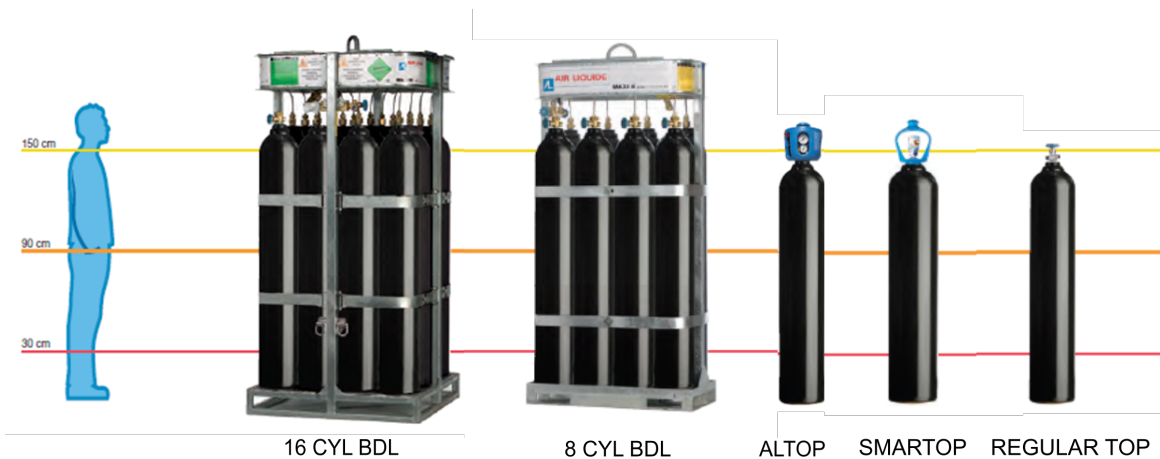

Product Code	200574	200576
Packaging	CYL TOP	BDL 16X
Volume (m3)		
Max Weight -kgs (Full)	73	1680
Water Capacity (Liters)	50	800
Purity	H2 ± 0.5%	
Impurities		
Valve Specification	RPV G 3/4-14, LH Internal	

Material Safety Datasheet

Product Complies to :

EN ISO 14175-R1-ArH-5, ANSI / AWS A5 32, A5 32M-97

Air Liquide India Holding Pvt. Limited
 A-24/10, Mohan Cooperative Industrial Estate,
 Mathura Road, New Delhi - 110044
 Tel: +91 11 6129 2200, +91 99106 53688
 email : sales.india@airliquide.com

www.airliquide.com