




Quality, purity and performance captured in one shielding gas.

Application

TIG welding for all materials, MIG welding of Aluminium & copper alloys. Root shielding of all materials. PLASMA and annular gas in Plasma processes. Pilot arc gas for Plasma cutting.

Safety Information

UN Number : 1006
Hazchem : 2T
 2 = Fine Water Spray
 T = PPE; BA and Full Fire kit
 Appropriate measures : dilute
 E = Public Hazard Safety

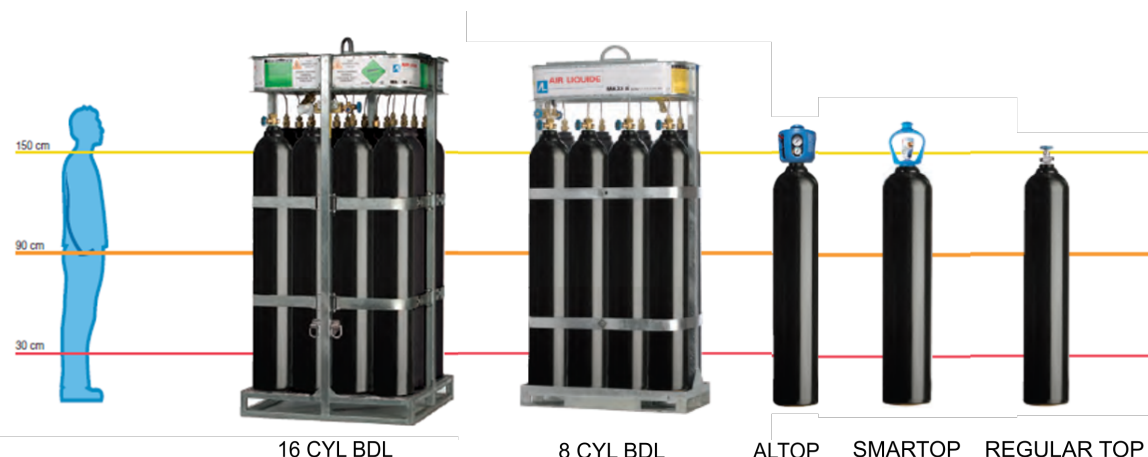

Product Code	200325	200338
Packaging	BDL 16X	CYL TOP
Volume (m3)		
Max Weight -kgs (Full)	1680	73
Water Capacity (Liters)	800	50
Purity	99.998%	
Impurities		
Valve Specification	RPV G3/4-14, RH-External	

Material Safety Datasheet

Product Complies to :

EN ISO 14175-I1-A, ANSI / AWS A5 32, A5 32M-97

Air Liquide India Holding Pvt. Limited
 A-24/10, Mohan Cooperative Industrial Estate,
 Mathura Road, New Delhi - 110044
 Tel: +91 11 6129 2200, +91 99106 53688
 email : sales.india@airliquide.com

www.airliquide.com